
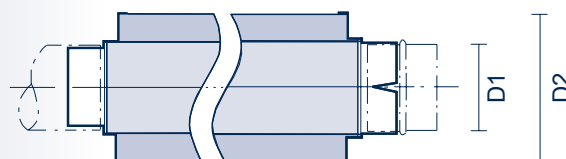


Circular flexible silencers (TSD50)
Circular flexible silencers (TSD25)



CIRCULAR SILENCER
from Alu flexible tube, double-walled, with inside insulation 50 mm

D1/D2	Length 500 mm	Length 1000 mm
	€/piece	€/piece
80/180	23,81	30,09
100/200	27,60	32,90
125/224	32,68	38,09
140/250	33,55	40,91
150/250	34,63	42,10
160/250	33,88	42,64
180/280	41,34	51,95
200/300	44,16	52,81
224/315	46,10	63,20
250/355	56,93	69,59
280/400	63,42	77,38
300/400	67,86	80,84
315/400	71,43	83,01
355/450	90,69	103,14
400/500	110,71	124,46

TSD 50 and TSD 25. Inflammable, temperature resistance to 200°C. Is composed of an outside tube and an inside punched tube. The absorbent material (50 mm or 25 mm, inflammable) is with fibre-glass protected.

Flex angle:
 $r = 3 \times \text{diameter of outside tube}$

CIRCULAR SILENCER
from Alu flexible tube, double-walled, with inside insulation 25 mm

D1/D2	Length 500 mm	Length 1000 mm
	€/piece	€/piece
80/125	20,02	24,68
100/150	21,97	27,27
125/180	25,43	31,82
140/180	25,98	32,36
150/200	28,14	34,63
160/200	29,87	37,45
180/224	33,77	40,04
200/250	38,20	46,32
224/280	42,64	51,51
250/300	47,08	54,98
280/355	56,71	66,88
300/355	57,36	67,53
315/355	58,77	69,05
355/400	68,94	82,25
400/450	80,28	102,38

D1 = Diameter (mm)

Ordering example: **TSD-(length)-(insulation)-D1/D2**