
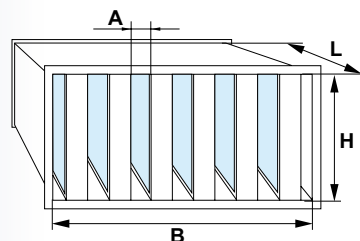


Typ KSD

Rectangular straight silencers

Zn

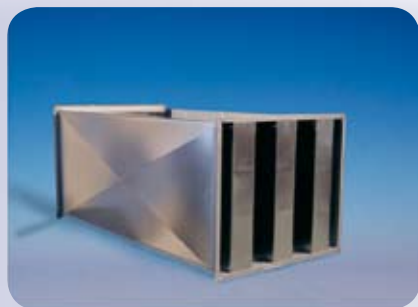

SILENCER (100 mm INSULATION MATERIAL) - rectangular -

Number of inputs		1	2	3	4	5	6	7	8
Silencer width B	from:	140 mm	280 mm	400 mm	600 mm	800 mm	1000 mm	1200 mm	1400 mm
	to:	280 mm	400 mm	600 mm	800 mm	1000 mm	1200 mm	1400 mm	1600 mm
Distance between inputs A	from:	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm	40 mm
	to:	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm	100 mm
Silencer length L	Silencer height H	€/piece	€/piece	€/piece	€/piece	€/piece	€/piece	€/piece	€/piece
	300 mm	75,08	101,15	126,84	156,16	181,85	200,84	234,79	243,34
500	450 mm	84,72	116,03	144,50	177,84	209,15	238,85	269,36	303,45
	600 mm	93,55	126,04	157,34	193,09	226,38	259,72	291,83	327,53
	900 mm	115,60	108,38	191,49	233,23	272,57	309,49	309,49	389,77
	300 mm	83,11	113,62	144,50	181,05	214,34	235,21	245,70	276,39
750	450 mm	94,35	129,25	163,39	202,73	238,85	273,75	317,52	351,24
	600 mm	104,79	144,50	182,23	224,78	264,92	304,25	345,62	387,74
	900 mm	132,46	177,04	224,78	272,57	322,34	367,29	327,96	463,20
	300 mm	91,94	126,84	162,96	203,91	242,44	252,92	278,99	295,33
1000	450 mm	105,59	146,91	187,05	233,23	279,79	318,70	361,68	407,01
	600 mm	117,21	163,39	207,12	257,31	306,28	339,58	397,38	445,16
	900 mm	150,12	201,92	257,31	315,92	370,51	426,28	481,67	535,08
	300 mm	104,36	144,12	183,84	226,01	268,13	288,20	294,29	372,96
1250	450 mm	116,03	163,39	209,15	263,31	313,51	357,24	407,43	457,21
	600 mm	130,85	183,84	234,41	293,01	348,41	399,78	453,19	508,58
	900 mm	175,81	245,65	320,31	394,16	467,64	538,66	610,91	683,59
	300 mm	113,33	156,16	202,73	257,31	305,48	326,21	343,83	429,82
1500	450 mm	128,44	181,85	236,44	295,42	351,62	402,19	457,21	513,40
	600 mm	145,73	205,51	264,92	330,74	392,18	449,98	509,39	572,81
	900 mm	199,09	279,79	358,04	440,73	520,63	600,90	680,78	760,66

Ordering example: **KSD-100-(number of inputs)-B/H/L**

AI Execution from AI: factor 2

V2A Execution from V2A: factor 4,5

V4A Execution from V4A: factor 7